

# 5-DIGIT METER RESETTABLE

# CM 05





- **5-digit h = 6 mm display**  
white digits on black background (whole)  
white digit on red background (decimal)

- **quick resetting lever**

- **materials**  
die-cast zamak body  
ABS casing  
metal internal kinematic motion devices


- **max speed**  
500.0 meters / min.

 gr. 357

 mm 125 x 65 x 35

## TYPICAL APPLICATIONS


Cloth - tape - rope - extruded materials - etc... measurements

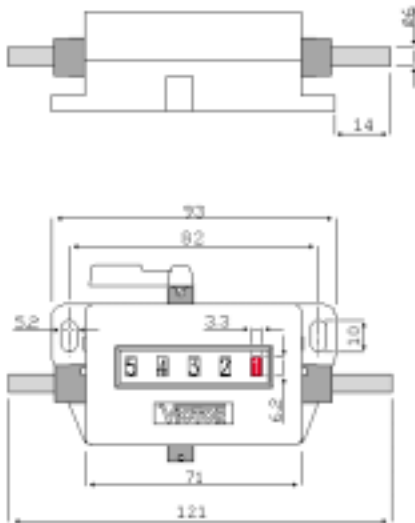


COD.	MOD.	GEAR RATIO	SHAFT OUTPUT	ROTAT.
FC0010/101	<b>CM 05 D</b>	10 revol. /1.0 meters (+)	passing	right
FC0010/102	<b>CM 05 S</b>	10 revol. /1.0 meters (+)	passing	left
FC0010/103	<b>CM 05 D</b>	5 revol. / 1.0 meters (++)	passing	right
FC0010/104	<b>CM 05 S</b>	5 revol. / 1.0 meters (++)	passing	left


**Note :**

- (+) To be fitted with 100 mm development [ a ] wheels
- (++) To be fitted with 200 mm development [ b ] wheels



COD.	RIF.	DESCRIPTION	Ø mm.	STRIP WIDTH mm
FV0010/081	[ a ]	Knurled aluminium wheel Development = 100 mm	31.83	10
FV0010/080	[ a ]	Knurled moplen wheel Development = 100 mm	31.83	10
FV0010/087	[ b ]	Rubberized moplen wheel Development = 200 mm	63.66	17





CODE INDICATION		
model	shaft rotation	gear ratio
<b>example of order</b>	<b>CM 05</b>	<b>S</b>
<b>description</b>	<i>left</i>	<i>5 rounds per meter with red decimal</i>

