## OSITION INDICATORS

## 3, 4 OR 5-DIGIT POSITION INDICATORS

WITH ELECTRIC CONTACT



## Available in standard versions:

- 3, 4 or 5-digit h=23 mm display white digits on a black background (whole) white digit on red background (decimal)
- materials
   zamak die-cast body
   cover in stainless steel
   internal kinematic mechanisms in
   synthetic, self-lubricating and brass materials
- on request: last white digit on red/black background with millimetric hatching



gr. 1,800





mm 205 x 170 x 155



## TYPICAL APPLICATIONS

In addition to the usual function of displaying measurements, this family of devices equipped with micro-circuit breakers controlled by cams, gives On-Off signals that can be used for a wide range of mechanisms.

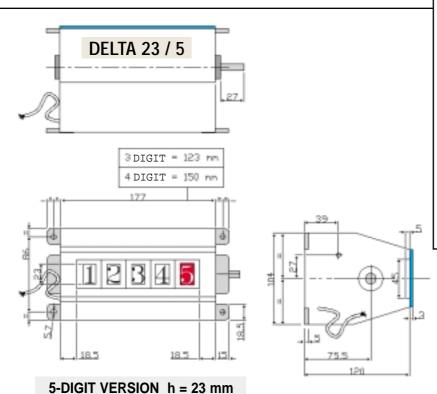

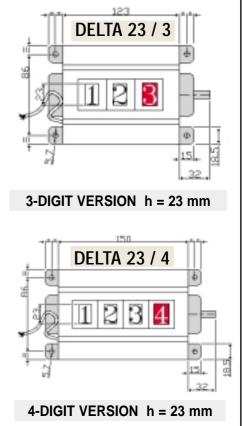

IS