



# METERS

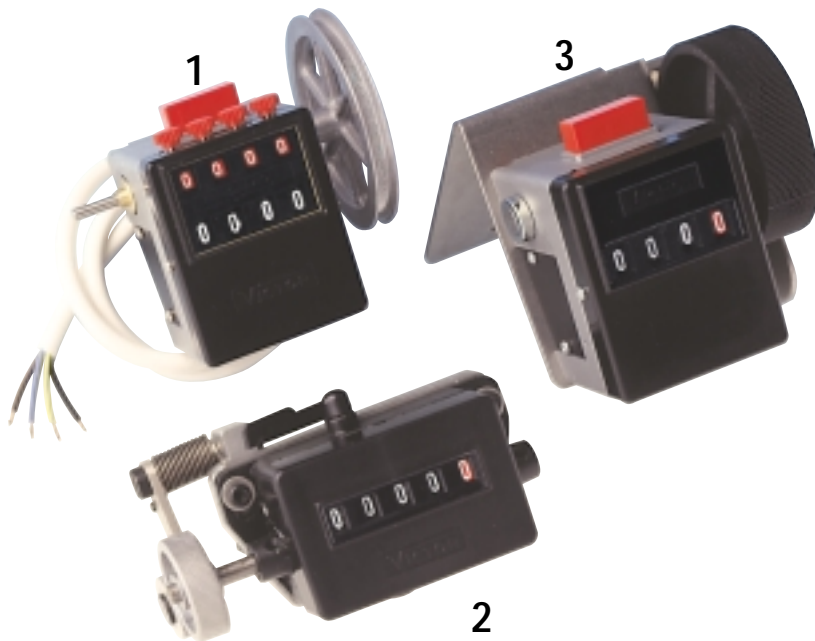

1 - PREDETERMINING AND RESETTABLE REVOLUTION DOWNCOUNTING METER FOR THREADS

2 - METERS FOR TAPES

3 - METER FOR WIRES

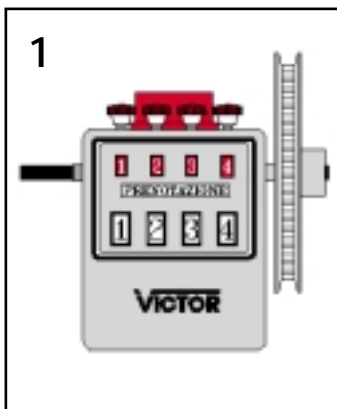

## TEXTILE 04

- **4-digit h = 6 mm display**  
4 white digits on black background (counting)  
4 white digits on red background (programming)
- **quick press resetting key for preset value**
- **materials**  
Die-cast zamak body  
ABS casing  
Metal internal kinematic motion devices
- **fixed displayed preset value**
- **contact range** 1 AMP, 24 V CC;
- **command shaft**  
in AVP steel mounted on very smooth ball bearings (torque  $5 \pm 10$  gcm)



gr. 420




mm 115 x 95 x 50

### TYPICAL APPLICATIONS

Speed indicator version: tool machines, winding machines, automatic machines, etc.

Meter version: particularly suited to the measurement of weaving thread (silk thread, wool, etc...) as well as tape, rope, clothe, etc....

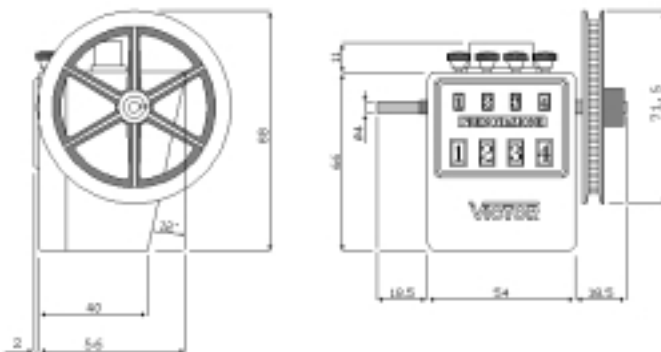

### ACCESSOIRES:

- Knurled sheave, development 200 mm
- Knurled rubberized pulley, development 200 mm

	RATIO	MEASUREMENT RANGE	SPEED COMMAND SHAFT
1/1	1 round=1 digit	speed indicator	5,000
1/2	1 round=2 dm	m 999.9	2,500
5/1	5 rounds=1 m	m 9,999	15,000
50/1	50 rounds=1 dam	m 9,999(x10)	15,000
500/1	500 rounds=1 hm	m 9,999(x100)	15,000

COD.	MOD.	
FC0475/001	TEXTILE 04 1/1	SHAFT OUTPUT
FC0475/002	TEXTILE 04 1/2	right
FC0475/003	TEXTILE 04 5/1	
FC0475/004	TEXTILE 04 50/1	ROTATION
FC0475/005	TEXTILE 04 500/1	right

